

BA-2501

Quick Reference Guide

Ver. Q2

All Rights Reserved. Copyright 2017

Packing Checklist

If you discover any item below are damaged or lost, please contact your vendor immediately.

<input checked="" type="checkbox"/>	BA-2501	x 1
<input checked="" type="checkbox"/>	This Quick Reference Guide	x 1
<input checked="" type="checkbox"/>	Manual/Driver CD	x 1
<input checked="" type="checkbox"/>	Mini Jumper (2.0 mm)	x 6
<input checked="" type="checkbox"/>	SATA Cable (500 mm)	x 1
<input checked="" type="checkbox"/>	I/O Shield	x 1

Jumper Setting

CAUTION! Danger of explosion may occur if the battery is replaced incorrectly. Replace batteries only with the same or equivalent type recommended by the manufacturer. Dispose the used batteries according to the manufacturer's instructions.

Hardware Power Failure Selection

1 2 3	1 2 3
Enable	Disable (default)

JCMOS1 Clear CMOS Data Selection

1 2 3	1 2 3
Normal (default)	Clear CMOS

JP13 Mini PCIE Voltage Selection


1 2 3	1 2 3
3.3V	3.3V_AUX (default)

Mini PCIE and mSATA Selection

1 2	1 2
mSATA	Mini PCIE (default)

JPCOM4/3 Port RI & Voltage Selection

2 1	2 1	2 1
6 5	6 5	6 5
RI (default)	5V	12V

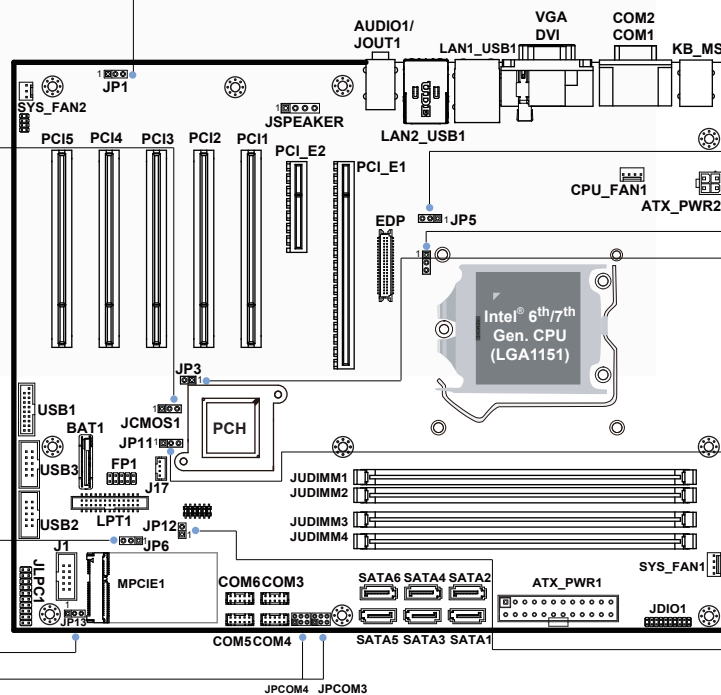

LAN2 Enable/Disable Selection

1 2	1 2
Disable (default)	Enable

VCCIO Voltage Selection

1 2	1 2
1.0V	0.95V (default)

Flash Descriptor Override Selection

1 2	1 2
Disable (default)	Enable

PCH Configuration / Recovery Selection

1 2	1 2	1 2
Normal (default)	Configure	Recovery

Case Open Detection Selection


1 2	1 2
Case Open Event (default)	Case Close

*Note that C236 / Q170 SKU has MPCIE1, SATA1~6, JUDIMM1~4, PCI_E1~2 available. H110 SKU only has SATA1~4, JUDIMM1/3, PCI_E1~2 available. LPT1 is only available for C236 SKU only.

BA-2501

ATX Intel® 6th/7th Gen. Core™ i7 / i5 / i3 / Pentium® / Celeron® Processor

Front View

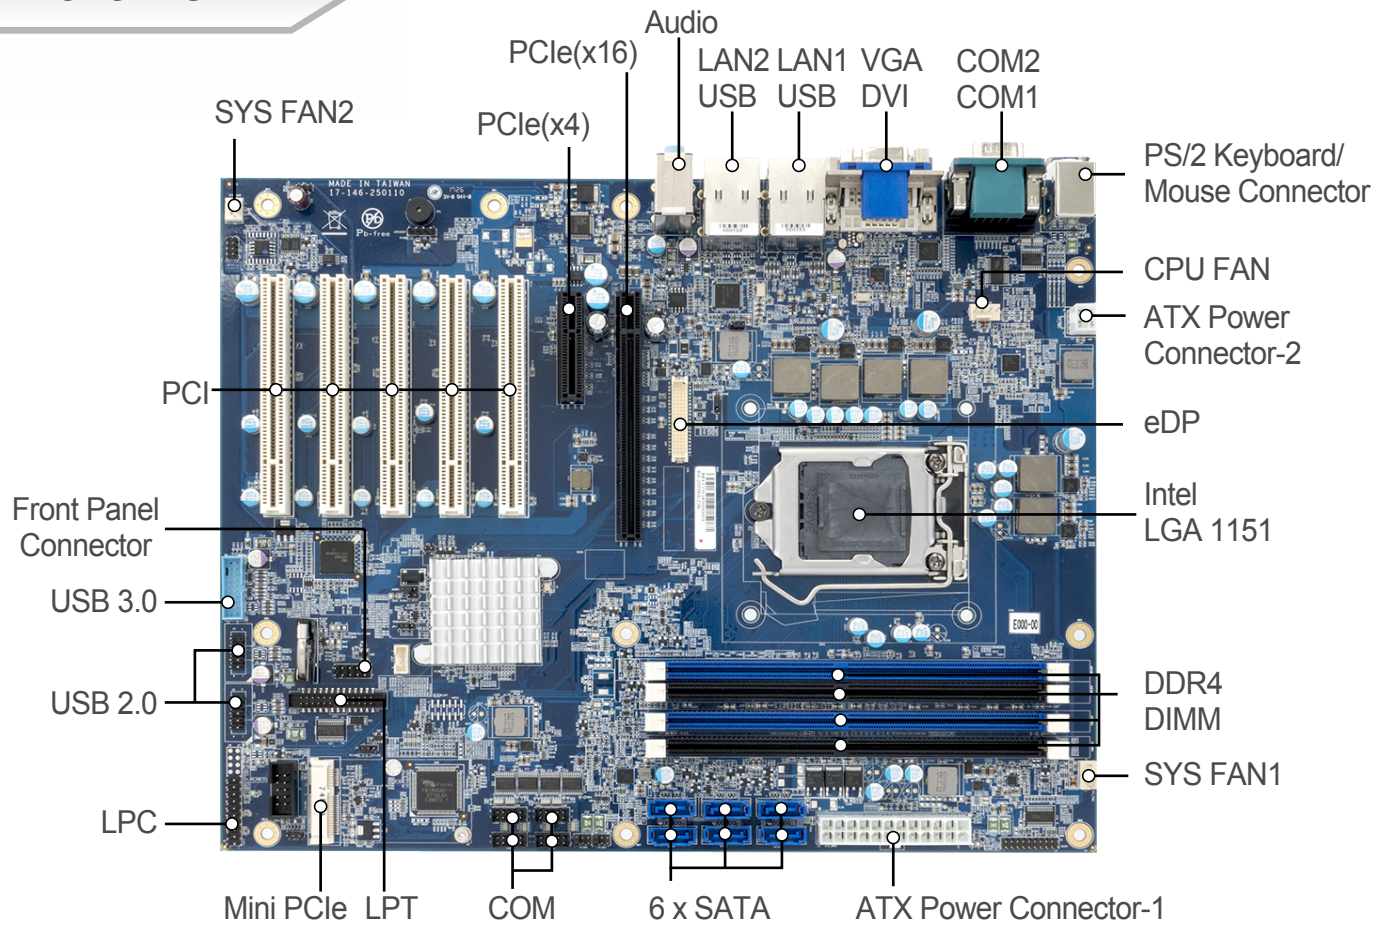

I/O View

