


# Packing Checklist

If you discover any item below damaged or lost, please contact your vendor.

- BE-0966 x 1
- This Quick Reference Guide x 1
- Jumper (2.0 mm) x 12
- SATA Power Cable (90 mm) x 1
- DC In Power Cable (200mm) x 1

# BE-0966

## Quick Reference Guide

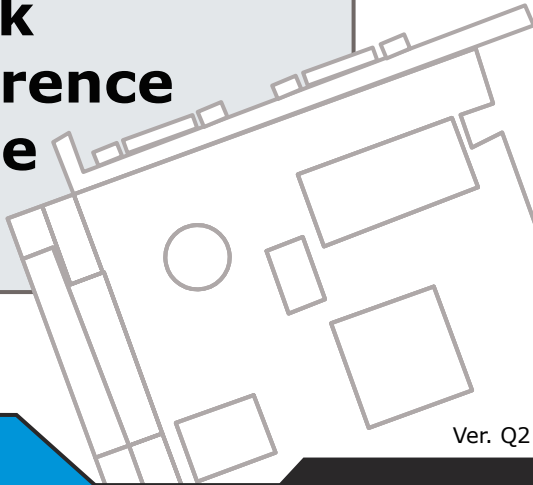

Ver. Q2


All Rights Reserved. Copyright 2016

# Jumper Setting


### CAUTION!

Danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.



#### PMIC POWER ON Setting




#### LVDS Panel Voltage Selection




#### Inverter ENABKL Voltage Selection

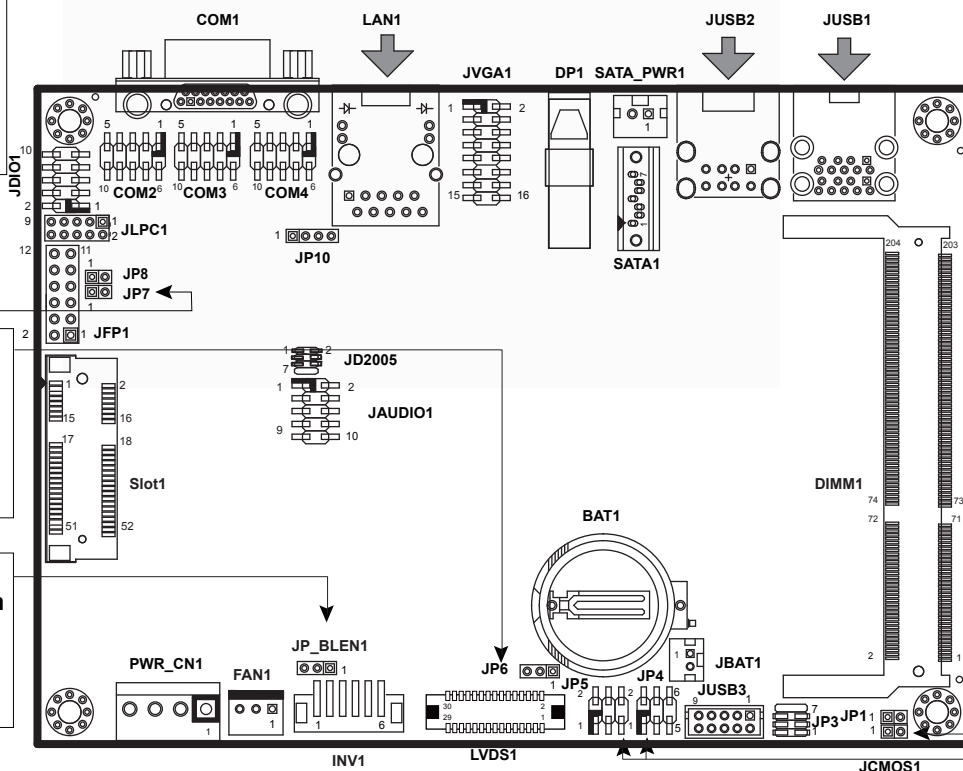

#### LVDS Panel Setting

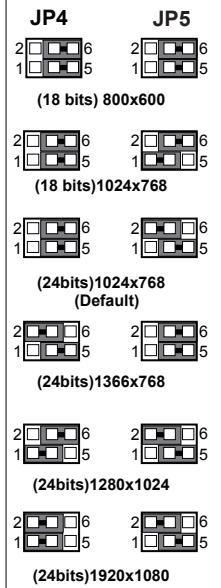


#### Clear CMOS Data Selection



# BE-0966

3.5" SBC supports Intel® Bay Trail SOC with VGA/ Audio/ 4COM/ 1LAN

## Front View

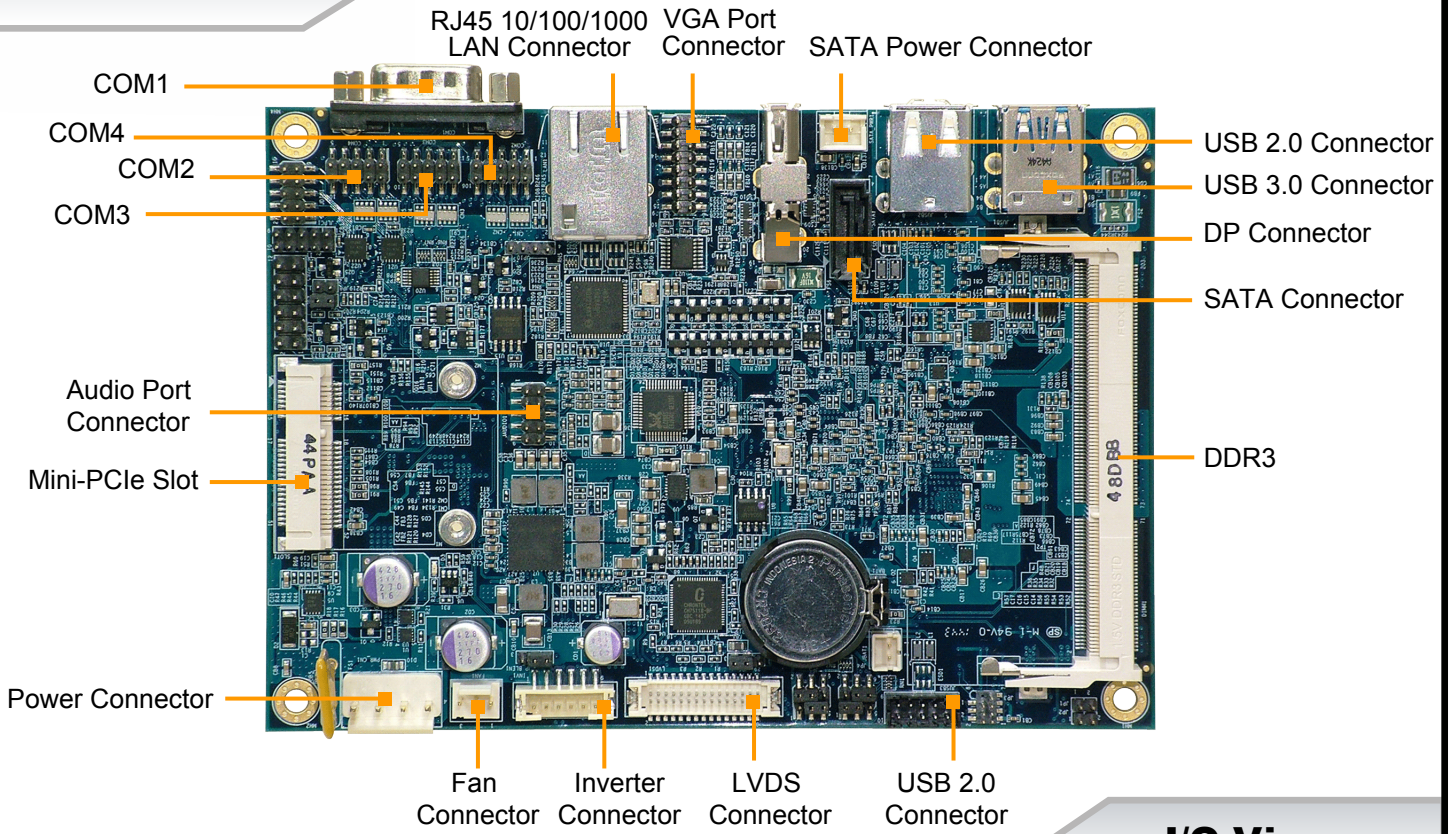

## I/O View

