

KS-1132

> Self-Service Payment Kiosk



Features




- 21.5" Full HD TFT-LCD
- Projected capacitive touch panel
- Embedded with 1D/2D barcode scanner
- Embedded with 2" or 3" thermal printer
- Embedded with MSR/IC card reader & face camera
- Portable box PC for easy maintenance
- Customizable payment terminal bracket
- Simple structure and easy maintenance


Applications

- Retail and chain store service kiosk
- Food ordering and payment kiosk
- Ticket selling service kiosk
- City information and coupon kiosk

Highlights

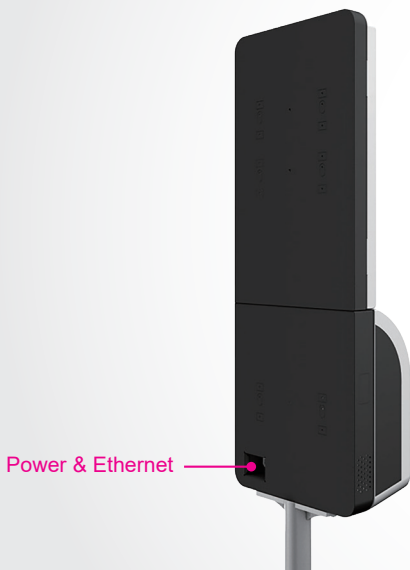

Power & Ethernet

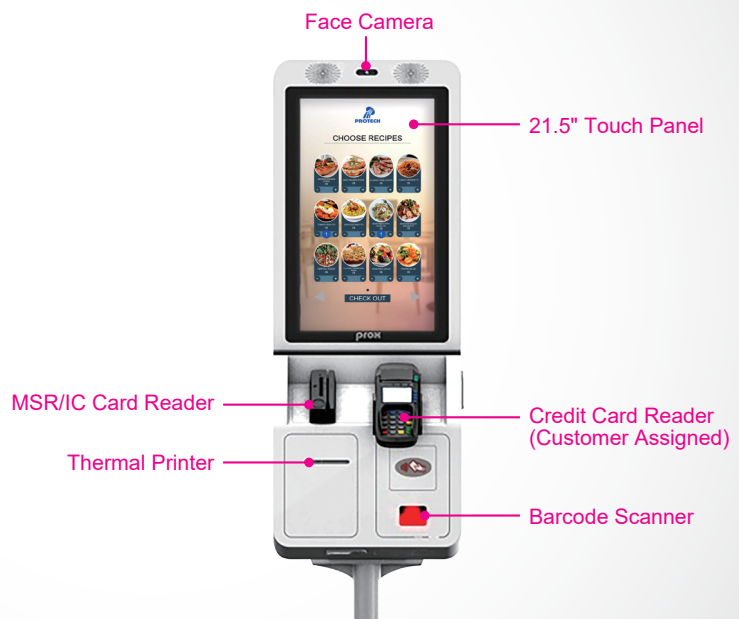

Face Camera

21.5" Touch Panel

MSR/IC Card Reader

Credit Card Reader
(Customer Assigned)

Thermal Printer




Barcode Scanner

Specifications



| | | |
|-------------------|------------------------|--|
| System | CPU | High-End: Intel® Celeron® G3930TE Intel® 7th Gen. Core™ i7-7700T Intel® 7th Gen. Core™ i5-7500T Intel® 7th Gen. Core™ i3-7101TE Entry Level: Intel® Celeron® J1900 |
| | Memory | High-End: Max. up to 16GB DDR4 SO-DIMM memory Entry Level: Max. up to 8GB DDR3L SO-DIMM memory |
| | HDD | 1 x 500GB 2.5" SATA HDD |
| | Network | Gigabit 10/100/1000 Base-T Fast Ethernet |
| | Power Supply | 1 x 12V power supply |
| | System Weight | 67.71 kg (with stand) 41 kg (without stand) |
| | Dimensions (W x H x D) | 580 x 1708 x 600 mm (with stand) 385 x 1105 x 175 mm (without stand) |
| | O.S. Support | Windows 10 / Windows 7 / POSReady 7 |
| Operating Display | LCD | 21.5" TFT LCD |
| | Max. Resolution | 1920 x 1080 |
| | Brightness | 250 cd/m ² |
| | Touchscreen | Projected capacitive touch |
| | Viewing Angle | Horizontal: (R) 89° / (L) 89° Vertical: (U) 89° / (L) 89° |
| Add-ons | Thermal Printer | 2" or 3" standalone thermal printer for 58 mm or 80 mm paper roll |
| | Barcode Scanner | 1D/2D barcode scanner |
| | MSR/IC Card Reader | RS232 interface of the hybrid card reader intended to read ISO/JIS II format magnetic card and read/write ISO7816/EMV/memory chip smart card |
| | Face Camera | 16:9 2.1M-Pixels Full HD H.264 PC camera |
| | Credit Card | Based on customer requirements |
| | e-Payment | Based on customer requirements |
| | RFID | Read/Write ISO 14443A Mifare |
| Environment | EMC & Safety | CE / FCC |
| | Operating Temp. | 0°C~35°C |
| | Storage Temp. | -5°C~60°C |
| | Humidity | 20%~85% (no condensation) |

Dimensions

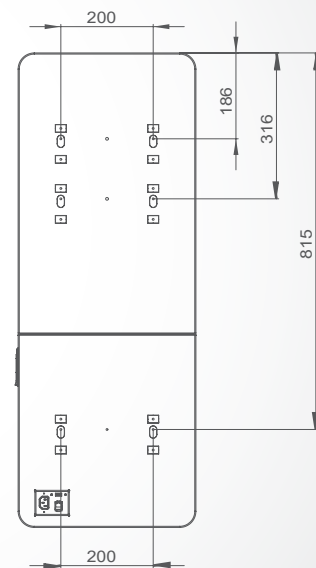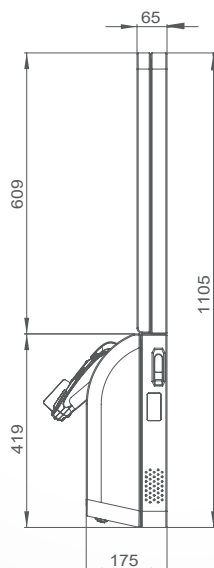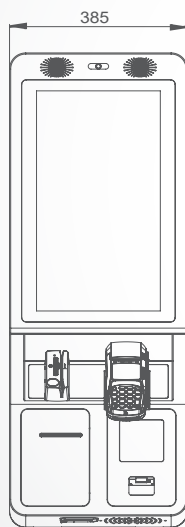

unit: mm