



21.5" Multi-Functional Self-Service Kiosk



Features

- Powered by Intel® Core™ i5 / i3 / Celeron®
- Full HD display with P-Cap touch panel
- Ergonomic design for best user experience
- Capable of self-service & digital signage
- Stylish & ideal for all scenarios and applications

Applications

- Hotel check-in self-service kiosk
- Airport check-in kiosk
- Retail and chain store service kiosk
- Food ordering and payment kiosk
- Ticket selling service kiosk
- Hospital service kiosk
- Library service kiosk





Specifications

System	
CPU	Intel® Core i5-1145G7E Intel® Core i3-1115G4E Intel® Celeron® 6305E
Memory	1 x DDR4 SO-DIMM slot (default 4GB)
HDD	1 x M.2 2280 SATA III or NVME SSD (default 128GB)
Network	1 x 10/100/1000 Base-T Gigabit Ethernet (RJ45) 2 x RJ45 Reserved Connectors
Power Supply	100-240V available
System Weight	35 kg
Dimensions (W x H x D)	360 x 732 x 218 mm
O.S. Support	Windows 11 / Windows 10
Operating Display	
LCD	21.5" TFT LCD
Max. Resolution	1920 x 1080
Brightness	250 cd/m ²
Touchscreen	Projected capacitive touch
Viewing Angle	Horizontal: (R) 89° / (L) 89° Vertical: (U) 89° / (L) 89°
Add-ons	
Barcode Scanner	1D: EAN-8, EAN-13, UPC-E, UPC-A, Code 128, UCC/EAN 128, I2Of5, ITF-14, ITF-6, Matrix 25, CodaBar, Code 39, Code 93, ISSN, ISBN, Industrial 25, Standard 25, Plessey, Code11, MSI-Plessey, UCC/EAN Composite, GS1 Databar, Code 49, Code 16K 2D: PDF 417, QR Code, Micro QR, Data Matrix, Aztec, Maxicode, Chinese Sensible Code, GM Code, Micro PDF417 Code, Code One
Thermal Printer	HPRT TP-808 Resolution 203dpi · 8dots/mm Print Speed 260mm/s WINPOS K837V Resolution 203dpi Print Speed 170mm/s
Environment	
EMC & Safety	CE / FCC
Operating Temp.	0°C~40°C
Storage Temp.	0°C~60°C
Humidity	20%~85% (no condensation)

Highlights



Dimensions

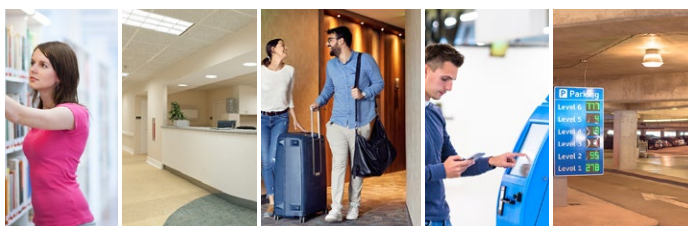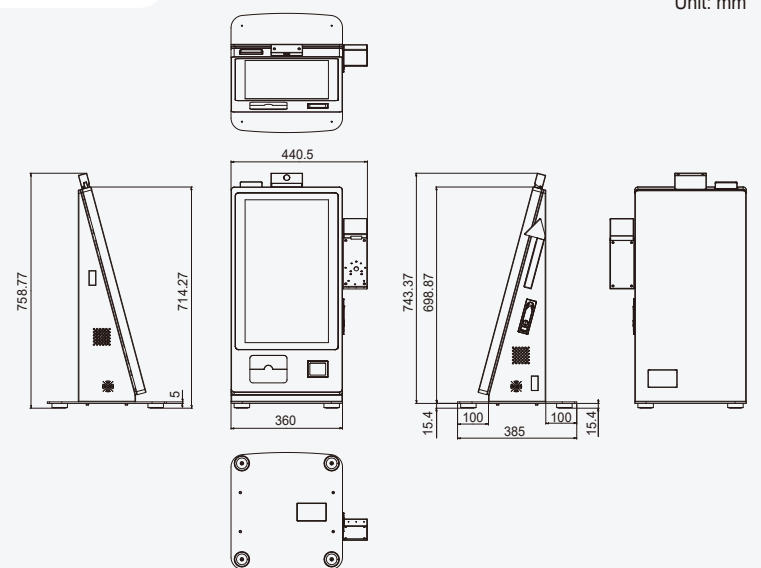

* All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information. For detail mechanics drawing, please contact our sales.