

# PA-J600E

> Multi-Functional Kiosk



## Features




- Fanless design with Intel® Core™ i5-7300U / i3-7100U / Celeron® 3965U
- 21.5" LCD display with projected capacitive touchscreen
- Aluminum die casting back cover
- HDD easy maintenance design
- Versatile design for multiple applications
- MSR / i-Button / Fingerprint / RFID / Barcode Scanner / Camera (Optional)
- VESA 100 x 100 standard

## Applications

- Retail
- Food Service
- Information
- Hospitality

## Highlights

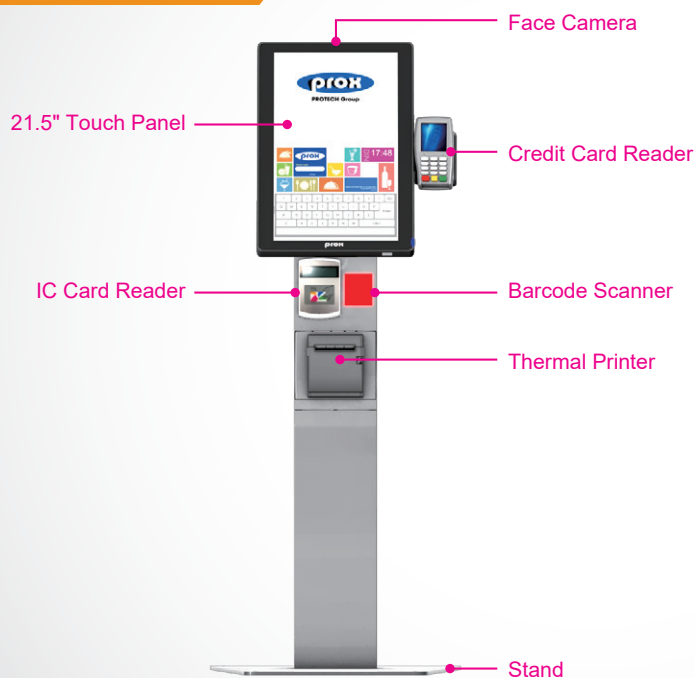

\*All information contained in this document is subject to change without prior notice. Please log on [www.protech.com.tw](http://www.protech.com.tw) to acquire latest information.

## Specifications



System	CPU Support	Intel® Core™ i5-7300U / i3-7100U / Celeron® 3965U
	Memory	1 x DDR4 SO-DIMM slot (up to 16GB)
	Network	1 x Giga LAN (RJ45) for 10/100/1000 Mbps
	Power Supply	90 watt power adapter for standard 120 watt power adapter for printer stand
	Audio	2W speaker
	System Weight	40 kg
	Dimensions (W x H x D)	550 x 1379 x 480 mm
	O.S. Support	Windows 10
Storage	SATA	1 x 2.5" HDD or SSD 1 x M.2 2242 type, SATA interface
	I/O Ports	USB: 2 + 2 (optional) x USB 2.0 / 2 x USB 3.0 Serial Ports: 1 x DB-9, 2 + 1 (optional) x RJ45 (all support +5V/+12V selectable) LAN: 1 x Giga LAN (RJ45) for 10/100/1000 Mbps Display: 1 x VGA (DB15) 1 x HDMI Audio: 1 x Speaker Cash Drawer: 1 x RJ11 (+12V or +24V selectable) DC In: 1 x 4 pin DC power jack, 24VDC In
Add-ons	MSR & i-Button	ISO I,II,III; JIS II and support information key
	RFID	ISO14443A read/write; ISO18092 read only
	Camera	5.0M pixel CMOS camera module
	Barcode Scanner	1D: EAN-13, EAN-8, UPC-A, UPC-E, ISSN, ISBN, Codabar, Code 128, Code 93, ITF-6, ITF-14, Interleaved 2 of 5, Industrial 2 of 5, Standard 2 of 5, Matrix 2 of 5, GS1 Databar, Code 39, Code 11. 2D: PDF417, QR Code, Micro QR, Data Matrix.
Display	LCD	21.5" TFT LCD
	Max. Resolution	1920 x 1080
	Brightness	250 cd/m <sup>2</sup>
	Touchscreen	Projected capacitive
	Tilt Angle	0~60 degrees
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0°C~35°C
	Storage Temp.	-5°C~60°C
	Humidity	20%~90%

## Dimensions

