

SE-8400

Intel® 7th / 6th Gen. Core™ Fanless and High Performance Embedded PC



Features



- Intel® 7th / 6th Gen. Core™ i7 / i5 / i3 / Pentium® / Celeron® desktop processor (LGA1151)
- 2 x DDR4 2133MHz SO-DIMM memory up to 32GB
- 2 x 2.5" SATA III HDD/SSD with RAID 0/1 (Q170)
- 2 x Mini PCIe slots
- 2 x GbE LAN, PoE as option
- DVI-I & HDMI® for display
- 6 x USB 3.0 (in Q170)
- 1 x 8 in / 8 out DIO
- 6 x COM ports (2 ports for optional)
- Wide-ranged voltage DC In 9~36V
- Optional 1 x PCIe x4 expansion slot or 2 x PCI expansion slots (Q170)

Specifications



System

CPU Support	Core™ i7-6700TE, Quad Core, 2.4GHz, 8M cache Core™ i5-6500TE, Quad Core, 2.3GHz, 6M cache Core™ i3-6100TE, Quad Core, 2.7GHz, 4M cache Pentium® G4400TE, Dual Core, 2.4GHz, 3M cache Celeron® G3900TE, Dual Core, 2.3GHz, 2M cache
Chipset	Intel® Q170/ H110
Memory Support	2 x DDR4 2133MHz SO-DIMM up to 32GB
Watchdog	1~255 seconds watchdog timer selectable
Drive Bay	2 x 2.5" SATAIII HDD/SSD (support RAID 0/1 in Q170 SKU only)
Audio	1 x Line In / 1 x Line Out / 1 x Mic In
Expansion Slots	1 x full-sized Mini PCIe (Mini PCIe, USB and SIM signal) 1 x half-sized Mini PCIe (Mini PCIe and USB signal) 1 x SIM card slot 1 x CFast slot
System Weight	4.9 kg
Operating System	Windows 10 IoT LTSC 2016 / Windows 8.1 (64bit) / Windows 7 (64bit) / Linux Ubuntu 14.04 (64bit)
Dimensions	260 x 80 x 200 mm (W x H x D)
Power Input	DC In 9~36V
Certifications	FCC / CE


I/O Ports (Front side)

Display	1 x HDMI®
USB	2 x USB 3.0 (Q170), 2 x USB 2.0 (H110)
Serial Ports	COM 5/6 for RS232 (optional)
Parallel Port	1 x LPT port (optional)
SIM Card	1 x SIM slot
CFast Slot	1 x CFast slot
Antenna	3 x antenna hole
I ² C	1 x I ² C port (optional)
Power Output	1 x 3 pin terminal block for DC Out 5V/12V (1A max)(optional)

I/O Ports (Rear side)

Display	1 x DVI-I (DVI-D+VGA)
USB	4 x USB 3.0
Serial Ports	COM 3/4 for RS232 COM 1/2 for RS232/422/485 (selectable by BIOS) (COM 1/2 for +5V/+12V/RI selectable by jumper)
LAN	2 x GbE LAN, Wake-On-LAN, PXE LAN 1: Intel® PHY 219LM (10/100/1000 Mbps) LAN 2: Intel® LAN 210AT (10/100/1000 Mbps)
Digital I/O port	2 x PoE (IEEE 802.3af), max.15.4W for each port 8 in / 8 out, DSUB-25 connector or 16 pin terminal block (optional)
Audio	1 x Line In / 1 x Line Out / 1 x Mic In
Power Input	DC In 9~36V(DIN type 4 pin connector or 3 pin terminal block)
LED	1 x power LED, 1 x HDD LED, 2 x PoE active LED(optional)
Power On/Off	1 x power button, 1 x remote switch

System Front View & Rear View

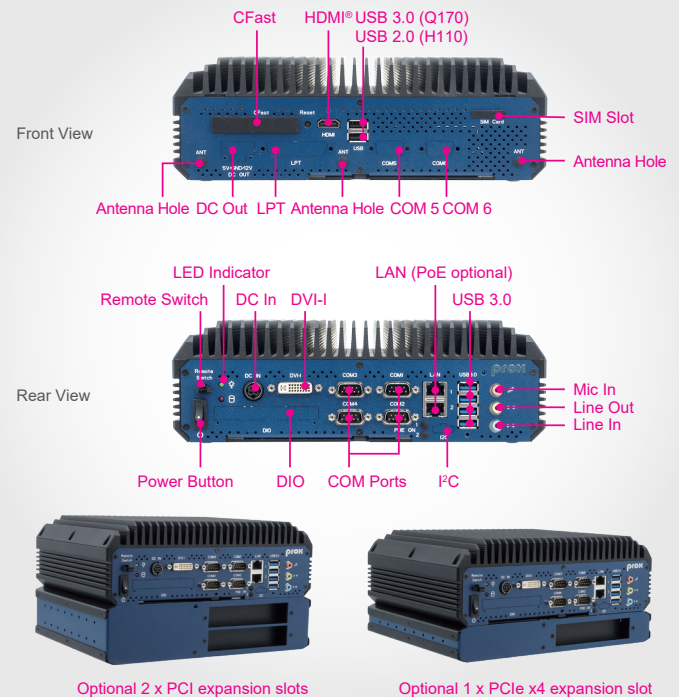

Environment

Operating Temp.	SSD: (w/o PoE) 0°C~50°C (32°F~122°F) (Ambient with airflow) (with PoE) 0°C~45°C (32°F~113°F)
Storage Temp.	-20°C~80°C (-4°F~176°F)
Humidity	20%~90%

Applications

- Automation
- Banking
- Information
- Hospitality
- Gaming

* All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information. For detail mechanics drawing, please contact our sales.