

SP-C085

› 8.4" VESA Mount / Wall Mount Standalone Touch Monitor



Features



- IP65 (front) with Aluminum bezel
- Operating temperature -20°C~60°C
- Modularized I/O: VGA + DVI-D + HDMI®
- Wall mount / VESA 100 mounting

Specifications

Model	SP-C085
Customer (2nd) Display	8.4" SVGA LCD (600 cd/m ²)
Display Resolution	800 x 600 (SVGA)
Dimensions (Panel)	225 x 177 x 49 mm (W x H x D)
Viewing Angle	Horizontal -80°~80°, Vertical -80°~70°
I/O Ports	VGA DVI-I cable (support DVI-D signal only) HDMI® USB (touch connection)
Power Supply	Type: DC12V/3.3A/40W/φ2.5 power adapter AC Input: 90~264 Vac, 47-63 Hz

Environment

EMC & Safety	CE
Operating Temp.	-20°C~60°C (-4°F~140°F)
Storage Temp.	-30°C~70°C (-22°F~158°F)
Humidity	5%~95%


Application

- Automation
- Information
- Transportation
- Medical
- Banking
- Chemistry


Highlights



I/O Panel View

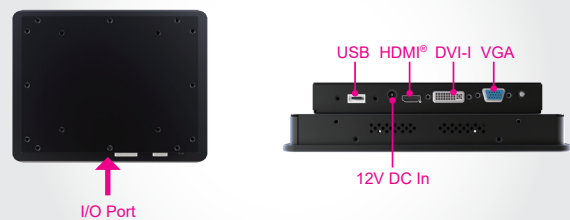

Dimensions

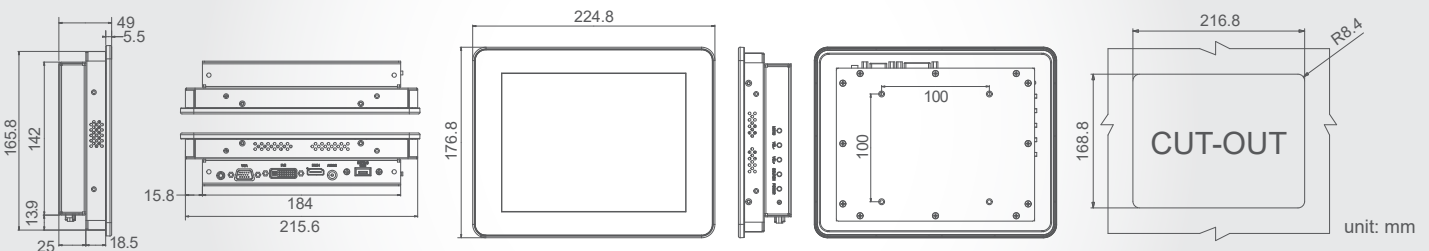

* All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information. For detail mechanics drawing, please contact our sales.