

SP-S216 V1.1

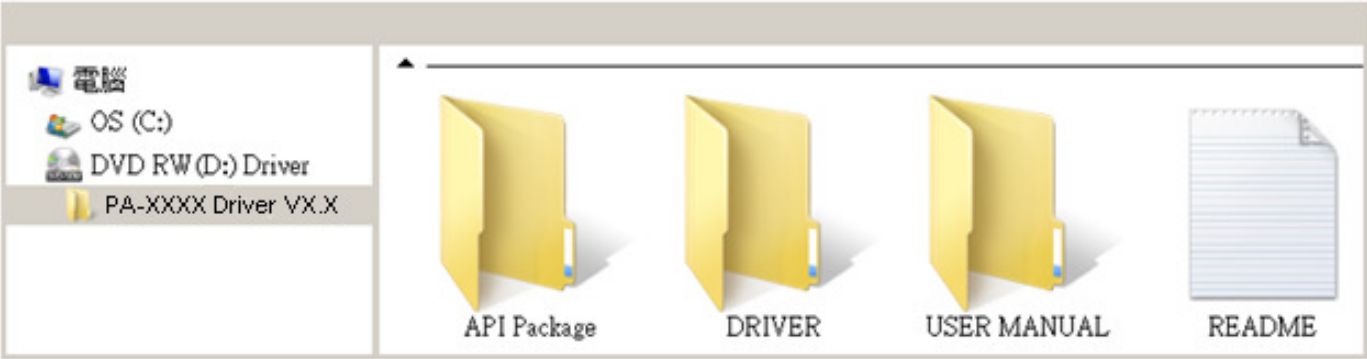
History Record

9/19->V1.0 first release

12/27->V1.1 Updated ME Version

2019/12/27

DRIVER DISC content

Layer 1	
\API Package	Folder
\DRIVER	Folder
\USER MANUAL	Folder
README	PDF file
	

Layer 2 \API Package folder	
\DEMO PROJECT folder	Demo AP
\Document folder	Guide
\Prox API Standard folder	A01-0000-000-03-181114 x64

Layer 2 \DRIVER folder

\Device folder	<p>Touch / HIDeGalaxTouch Driver (21.5" G215HAN01.2)</p> <table border="1" data-bbox="507 143 1273 322"> <tr> <td colspan="3">Main board version: RA</td> </tr> <tr> <td rowspan="2">for Windows7_Windows8_10</td> <td>32bit</td> <td>2.13.0.12305</td> </tr> <tr> <td>64bit</td> <td>2.13.0.12305</td> </tr> </table>	Main board version: RA			for Windows7_Windows8_10	32bit	2.13.0.12305	64bit	2.13.0.12305
Main board version: RA									
for Windows7_Windows8_10	32bit	2.13.0.12305							
	64bit	2.13.0.12305							
\Flash BIOS folder	BIOS & Updating tool								
\Platform folder	<p>Driver</p> <ol style="list-style-type: none"> The sequence of setup is, Main Chip => KMDF(Win7) => ME => Hotfix => Kaby Lake Graphics or Sky Lake_Graphics => LAN Chip => Sound Codec => USB3.0 [Device folder] (Win7) => RST You will be prompted to reboot when installation is complete. 								

Main Chip /Intel® Skylake / KabyLake CPU

Main board version: RA		
for Windows 7 Sky Lake	32bit	10.1.1.13
	64bit	10.1.1.13
for Windows Embedded 8.1 Sky Lake	32bit	NA
	64bit	10.1.1.13
for Windows 10 2016 Kaby Lake & Sky Lake	32bit	NA
	64bit	10.1.1.13
for Windows 10 2019 Kaby Lake & Sky Lake	32bit	N/A
	64bit	10.1.17968.8131

ME

Main board version: RA		
for Windows 7	32bit	11.6.20.1221
	64bit	11.6.20.1221
for Windows Embedded 8.1	32bit	NA
	64bit	11.6.20.1221
for Windows 10 2016	32bit	NA
	64bit	11.6.20.1221
for Windows 10 2019	32bit	N/A
	64bit	11.8.50.3425

Windows update KMDf & MBI

Main board version: RA		
for Windows 7	32bit	kmdf-1.11-Win-6.1-x86
	64bit	kmdf-1.11-Win-6.1-x64
for Windows Embedded 8.1	32bit	NA
	64bit	NA
for Windows 10	32bit	NA
	64bit	NA

Hotfix / Windows10 critical security update

Main board version:RA		
for Windows 10 2016	32bit	NA
	64bit	kb3211320-x64 kb3213986-x64

Graphics /Intel® HD Graphics 530 / 610

Main board version: RA		
for Windows 7 Sky Lake	32bit	15.40.25.4463
	64bit	21.20.16.4590
for Windows Embedded 8.1 Sky Lake	32bit	NA
	64bit	21.20.16.4590
for Windows 10 2016 Kaby Lake & Sky Lake	32bit	NA
	64bit	21.20.16.4590
for Windows 10 2019 Kaby Lake & Sky Lake	32bit	N/A
	64bit	26.20.100.6708

Serial IO

Main board version: RA		
for Windows 10	32bit	N/A
	64bit	30.100.1902.1

RAID (RST)

Main board version: RA		
for Windows 7	32bit	14.8.0.1042
	64bit	14.8.0.1042
for Windows Embedded 8.1	32bit	NA
	64bit	14.8.0.1042
for Windows 10	32bit	NA
	64bit	14.8.0.1042

LAN Chip/ INTEL i219LM

Main board version: RA		
for Windows 7	32bit	21.0.504.0
	64bit	21.0.504.0
for Windows Embedded 8.1	32bit	NA
	64bit	21.0.504.0
for Windows 10 2016	32bit	NA
	64bit	21.0.504.0
for Windows 10 2019	32bit	NA
	64bit	24.2.0.0

/INTEL i210

Main board version: RA		
for Windows 7	32bit	21.0.504.0
	64bit	21.0.504.0
for Windows Embedded 8.1	32bit	NA
	64bit	21.0.504.0

for Windows 10 2016	32bit	NA
	64bit	21.0.504.0
for Windows 10 2019	32bit	NA
	64bit	24.2.0.0

Sound Codec / Realtek ALC888S

Main board version: RA		
for Windows7	32bit	R2.82
	64bit	R2.82
for Windows Embedded 8.1	32bit	R2.82
	64bit	R2.82
for Windows 10	32bit	R2.82
	64bit	R2.82

USB 3.0

for Windows7	32bit	4.0.0.36
	64bit	4.0.0.36

Layer 2 \USER MANUAL folder

User Manual SP-S216 User Manual M2

PDF File reader AdbeRdr930_en_US.exe