

PA-6322(PPC)

> 15" Fanless Slim POS Terminal / Panel PC



Features



- Fanless design with Intel® Celeron® J1900 CPU
- Aluminum die casting back cover
- Three different stands
- 15" true flat touchscreen
- HDD easy maintenance design
- MSR / i-Button / Fingerprint / VFD / 2nd display / wireless LAN (Optional)
- VESA 100 x 100 standard

Specifications



System	CPU Support	Intel® Celeron® J1900 CPU
	Memory	1 x DDR3L SO-DIMM slot (up to 8GB)
	Network	Gigabit 10/100/1000 Base-T Fast Ethernet
	Power Supply	60~90 watt power adapter
	Audio	2W speaker
	System Weight	Easy stand with power adapter approx. 6 kg (POS) / 5 kg (PPC)
	Dimensions (W x H x D)	POS type: 382 x 235 x 321 mm (with 45 degrees) PPC type: 382 x 310 x 55 mm
	O.S. Support	Windows 10 IoT Enterprise / Windows 8.1 / POSReady 7
Storage	SATA	1 x 2.5" HDD or SSD or SATA-DOM SSD
I/O Ports	USB	Rear: 3 x USB 2.0 / 1 x USB 3.0 Side: 1 x USB 2.0
	Serial Ports	3 + 1 (optional) x RJ45 (all support +5V/+12V selectable)
	LAN	1 x RJ45
	VGA	1 x DB15
	Cash Drawer	1 + 1 (option, with Y cable) x RJ11 (+12V or +24V selectable)
	DC In	1 x 4 pin DC power jack
Add-ons	Customer Display	VFD, 20 columns and 2 lines, each column is 5 x 7 dots
	Printer	2" or 3" easy loading thermal printer with auto-cutter
	MSR & iButton	JIS I or II, ISO Track1+2+3 (PS/2 interface)
	2nd Display	8" or 10.4" LCD
	Fingerprint	8-bit grayscale reader
Display	LCD	15" TFT LCD
	Resolution	1024 x 768
	Brightness	250 cd/m ²
	Touchscreen	Non-bezel-free: 5-wire analog resistive Bezel-free: 5-wire analog resistive or projected capacitive
	Tilt Angle	45~65 degrees with easy stand 0~68 degrees with normal stand 0~50 degrees with printer stand
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0°C~35°C
	Storage Temp.	-5°C~60°C
	Humidity	20%~90%

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

Applications

- Automation
- Retail
- Transportation
- Food Service
- Banking
- Information


POS Highlights



PPC Highlights



System I/O Ports

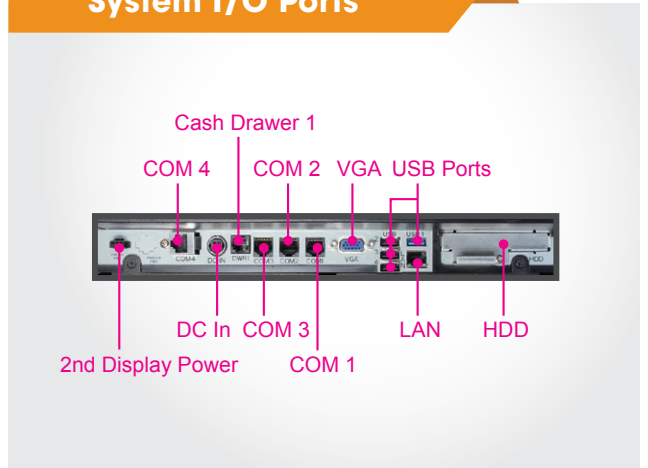

Dimensions

