

PA-6722(PPC)

> 15" Fanless Slim POS Terminal / Panel PC



Features



- Fanless design with Intel® Celeron® J1900 CPU
- Aluminum die casting back cover
- Three different stands
- HDD easy maintenance design
- MSR / i-Button / Fingerprint / VFD / 2nd display (Optional)
- VESA 100 x 100 standard

Specifications



System	CPU Support	Intel® Celeron® J1900 CPU
	Memory	1 x DDR3L SO-DIMM slot (up to 8GB)
	Network	Gigabit 10/100/1000 Base-T Fast Ethernet
	Power Supply	60~90 watt power adapter
	Audio	2W speaker
	System Weight	Easy stand with power adapter approx. 6 kg (POS) / 5 kg (PPC)
	Dimensions (W x H x D)	POS type: 388 x 234 x 223 mm (45 degrees) PPC type: 388 x 300 x 55 mm
	Viewing Angle	Easy stand: 30~50 degrees Normal stand: 0~70 degrees Printer stand: 0~55 degrees
	Color	Black
	O.S. Support	Windows 10 IoT Enterprise / Windows 8.1 / POSReady 7
Storage	SATA1	1 x 2.5" HDD or SSD
	SATA2	1 x SATA-DOM SSD
I/O Ports	USB	Rear: 3 x USB 2.0 / 1 x USB 3.0 Side: 1 x USB 2.0
	Serial Ports	3 + 1 (optional) x RJ45 (all support +5V/+12V selectable)
	LAN	1 x RJ45, GIGA
	VGA	1 x DB15
	Cash Drawer	1 + 1 (option, with Y cable) x RJ11 (+12V or +24V selectable)
	DC In	1 x 4 pin DC power jack
	HDD Slot	1 x HDD maintenance slot
	DC Out	1 x 3P power connector only for Protech printer
	Add-ons	Customer Display
Printer		2" or 3" easy loading thermal printer with auto-cutter
MSR & iButton		JIS I or II, ISO Track1+2+3 (PS/2 interface)
2nd Display		Hang on back: 8" or 10.4" LCD Standalone: 15" LCD
Display	Fingerprint	8-bit grayscale reader
	LCD	15" TFT LCD
	Resolution	1024 x 768
	Brightness	250 cd/m ²
Environment	Touchscreen	Non bezel-free: 5-wire analog resistive Bezel-free: 5-wire analog resistive or projected capacitive
	EMC & Safety	CE / FCC
	Operating Temp.	0°C~35°C
Storage Temp.	-5°C~60°C	
Humidity	20%~90%	

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

Applications

- Automation
- Retail
- Transportation
- Food Service
- Banking
- Information


POS Highlights



PPC Highlights



System I/O Ports

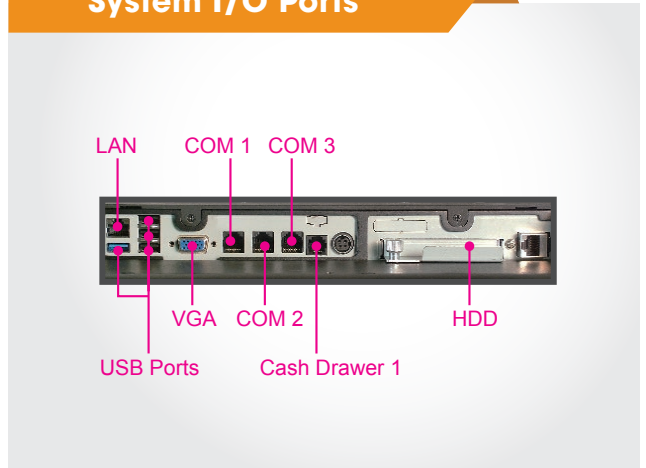

Dimensions

